

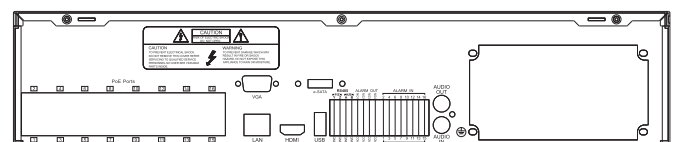


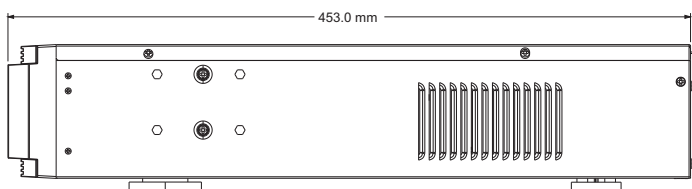

## QVIS® | 32 CH PoE NVR HDMI DISPLAY

### FEATURES:

- Support 32 CH 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface ( GUI ), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 16 CH simultaneous playback
- Search : time slice, time, event ( manual, sensor, motion ), tag search
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- 16 PoE network ports, support IPC direct connection to NVR; support PoE power supply
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Andriod OS

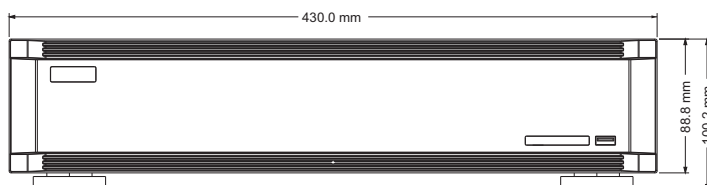



SPECIFICATION	VIPER-NVRPRO-32
<b>SYSTEM</b>	
Compression	Standard H.265
OS	Embedded Linux
<b>VIDEO</b>	
Network Input	32 CH IPC input
Network Access Bandwidth	256Mbps
Network Access Format	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps
Output	HDMI × 1 : 4K × 2K / 1920 × 1080 / 1280 × 1024 VGA × 1 : 1920 × 1080 / 1280 × 1024
<b>AUDIO</b>	
Network Input	32 CH IPC audio input
Output	RCA × 1
Two-way audio	RCA × 1
<b>RECORD</b>	
Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P
Record Stream	Dual stream recording
Mode	Manual, timer, motion, sensor
<b>PLAYBACK</b>	
Simultaneous Playback	Max 16 CH
Search	Time slice / time / event / tag search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
<b>ALARM</b>	
Mode	Manual, sensor, motion, exception
Input	16 CH local alarm input, support IPC alarm input
Output	4 CH
Triggering	Record, snap, preset, e-mail, etc.
<b>NETWORK</b>	
Interface	R J45 10 / 100 / 1000 Mbps × 1
PoE Port	RJ45 × 16
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
Web Client	Max 10 users online
<b>MOBILE DEVICE</b>	
OS	iOS, Andriod
<b>STORAGE</b>	
HDD	SATA × 8, e-SATA × 1, max 8T per HDD
<b>BACKUP</b>	
Local Backup	U disk, USB mobile HDD
Network Backup	Yes
<b>PORT</b>	
USB	USB 2.0 × 1 ( front panel ), USB 3.0 × 1 ( rear panel )
Remote Controller	Yes
<b>OTHERS</b>	
Power Supply	ATX
Consumption	≤ 15W ( without HDD )
Dimensions (mm)	430 × 453 × 89 ( W × D × H )
Work Environment	-10°C ~ +50°C , 10% ~ 90% humidity